



IKO SHINGLES THERMO SYSTEM


Torch-on application of shingles on OSB wooden deck on slope between 4° and 15°. For concrete decks torch-on can be used on slope between 4° and 45°.

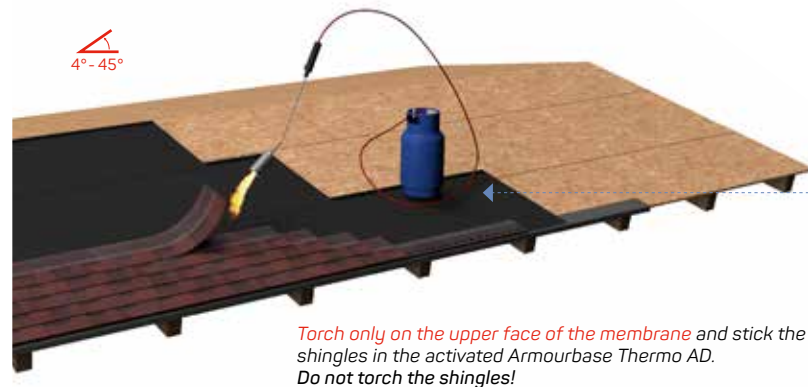

Torch only on the upper face of the membrane and stick the shingles in the activated Armourbase Thermo AD. Do not torch the shingles!



IKO Primer AD
(20 L) for concrete deck

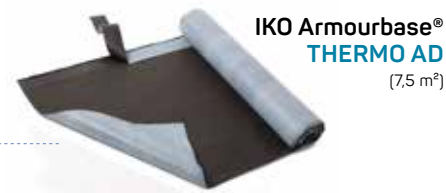

IKO Armourbase®
THERMO AD
(7,5 m²)

Mechanical fixing

Concrete screw with plate for fixation of Armourbase Thermo AD for slopes 15°-45°



MULTIFLASH	STARTERSTRIP	SHINGLESHOVEL	SOLAR BRACKET SET	ROOFBRACKET 45
 Black 16°-45° Flexible base Thermoplastic material	 In packs for Cambridge Xpress/ Xtreme roofs (21 m/bdl)  Superglass® for Cambridge Xpress/ Xtreme roofs (14 m/bdl)	116 cm 	15°-90°  Stainless steel 	 Black 

IKO
The Shingles Expert



IKO
The Shingles Expert

Dealer:



IKO Sales International NV

Truibroek 74
3945 Tessenderlo-Ham - Belgium

T +32 (0) 11/34 01 20
E residential.europe@iko.com

www.iko.eu

Product overview





**LONGEVITY
and
DURABILITY**



**LOCAL
EUROPEAN
raw materials**



**EASY
PURCHASE**

– order and buy
at your distributor



**LIGHTWEIGHT
MATERIAL**

– great for renovations



**ALL
ACCESSOIRES
in one spot**




**SATISFIED
CUSTOMERS**



A ROOF YOU CAN TRUST.

**PLATINUM =
COMPLETE ROOF
GUARANTEE:**
not only on the product!

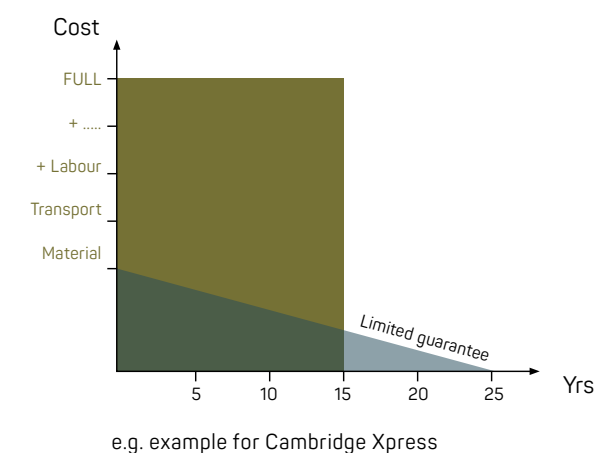

PLATINUM:

min. 5 yrs
max. 15 yrs

TOTAL:

Platinum +10 yrs = Total 15 yrs
Platinum +15 yrs = Total 30 yrs

01

– IKO offers you the maximum (Platinum) guarantee in the first 5 to 15 years, where material, transport and labour costs are covered in case of manufacturing defects. Remaining years of the Total guarantee period are covered by the pro rata material costs.

02

– IKO is in the roofing business for more than 75 years and is a financially healthy company without any external debts. This manufacturer's Platinum and Total guarantee is more solid for you to depend on than a guarantee from a local distributor

03

– IKO Platinum and total guarantee warrants only the shingles that are manufactured in Europe



**HOW DO THEY DO IT -
ROOF SHINGLES?**

IKO The Shingles Expert (EU) -
company film





LAMINATED SHINGLES



- Xtreme slope: $\geq 9,5^\circ$ (!) / $\leq 90^\circ$
- Xtreme resistance to high wind & heavy rain
- Xtreme unique: the world's first self-adhesive laminated shingle

TOTAL GUARANTEE
30
YEARS

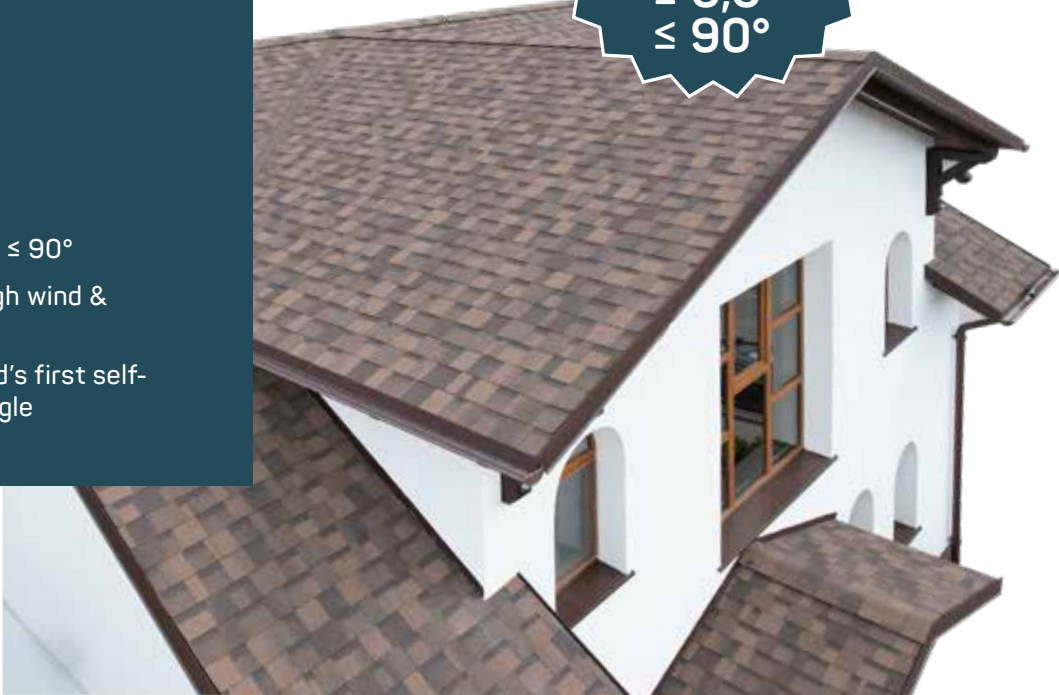

53 | Autumn brown

LAMINATED SHINGLES



- Most efficient laminated shingle in the world: more coverage than any standard shingle
- Cambridge Xpress Lane for improved nailing performance

TOTAL GUARANTEE
25
YEARS



50 | Harvard slate

	coverage / bundle (max. m²)
	bundle coverage (max. m) for hip and ridge
	bundles / pallet
	weight / m² covered
	shingles / bundle

CAMBRIDGE
XTREME
9,5

FrontBack

Platinum guarantee
15 years

9,5°-90°

43

49

50

52

53

54

55

	2,17		*
	66		10,95

14

* Use Superglass shingles

CAMBRIDGE
XPRESS

Platinum guarantee
15 years

15°-85°

43

49

50

51

52

53

54

55

	2,17		*
	66		10,75

14

* Use Superglass shingles



49 | Earthtone cedar



Cambridge Xtreme can withstand a wind of 220 km/h



How heavy are Cambridge shingles compared to tiles?



Can Cambridge resist a hailstorm?



Cambridge is the safest to walk upon without damage

PREMIUM SHINGLES


TOTAL GUARANTEE
25
YEARS

- Upgraded shingle option manufactured with polymer-modified bitumen
- More flexible at low temperatures
- Additional resistance at high temperatures
- Resistant against extreme weather conditions
- Maximum durability due to APP modified bitumen



- 01** | Black
- 07** | Dual brown
- 10** | Tile red

e.g. IKO roof viewer simulation




Platinum guarantee
10 years
15° - 85°

	2,58		10,3
	48		11,6

18




MONARCH®



Platinum guarantee
10 years
15° - 85°

	2,46		7,4
	42		11,2

22



MONARCH® - DIAMANT

TOTAL GUARANTEE
20
YEARS


SHIELD SHINGLES

- Self-adhesive shingle
- Can be used on steep slope roofs
- Excellent protection against wind-driven rain and ice dams
- Exceptional resistance to strong winds



- 23** | Amazon green ultra
- 26** | Chapel grey ultra

e.g. IKO roof viewer simulation



Platinum guarantee
10 years
15° - 90°




	2,00		6,0
	60		7,5

15




ARMOURSHIELD®
PLUS




Platinum guarantee
10 years
15° - 90°

	2,00		6,0
	60		8,9

18



DIAMANTSHIELD®
PLUS

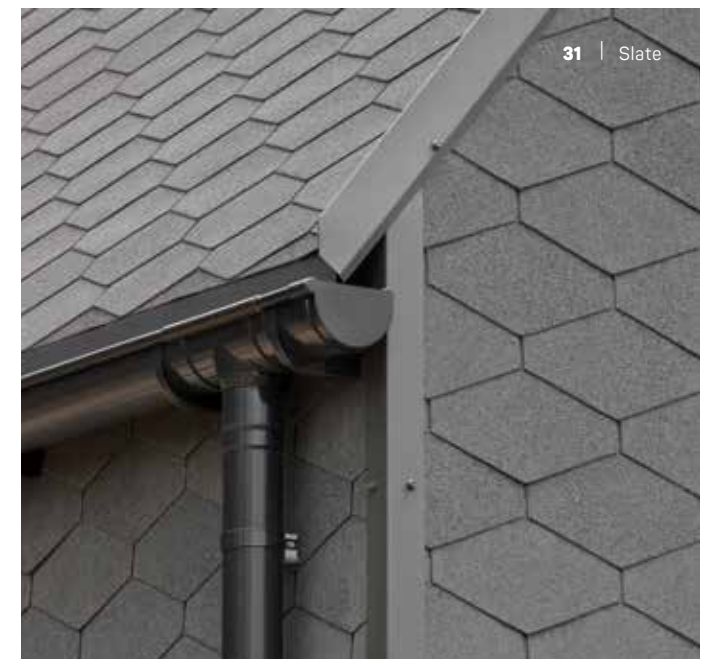

31 | Slate

2,00	8,0
66	10,7

15° - 85°

14

01

03

07

10

31

2,00	**
66	10,2

15° - 85°

14

01

10

2,00	6,0
60	10,4

15° - 85°

18

01

03

10

31

PLUS SHINGLES

- APP modified bitumen
- Superior quality high grade bitumen fibreglass shingle
- Exceeds the most stringent worldwide standards
- Additional UV protection thanks to APP Bitumen
- Higher flexibility with low(er) temperatures



e.g. IKO roof viewer simulation

- 01 Black

03 Amazon green

07 Dual brown

10 Tile red

16 Sky blue

20 Tile red ultra

23 Amazon green ultra

27 Dual brown ultra
- 31 Slate

49 Earthtone cedar

50 Harvard slate

51 Eastern grey

52 Dual black

53 Autumn brown

54 Aged redwood

55 Riviera red



CLASSIC SHINGLES

- Top quality high grade bitumen fibreglass shingle
- Most popular and time-tested shingle
- Exceptional value for money
- Highly resistant to colour fading

e.g. IKO roof viewer simulation

2,00	6,0
87	8,3

15° - 85°

14

51 | Eastern grey

01

03

07

10

16

31

49

50

51

52

53

54

55

2,00	*
87	7,9

15° - 85°

14

01

03

07

10

* Use Superglass shingles

3,00	8,9
45	6,8

15° - 90°

22

01

07

10

20


23

27


VENTS



Incl. 120 x T (50 mm)




x 10/ 




x 10/ 



Armourvent® MULTI	Armourvent® MULTI PLUS	Armourvent® RIDGE PLUS
600 x 22,8 cm	600 x 28,5 cm	122 x 27,9 cm
Monarch® Victorian® PLUS Armourglass® PLUS	Cambridge Xtreme 9,5° Cambridge Xpress Monarch®-Diamant DiamantShield® PLUS ArmourShield® PLUS Diamant® PLUS Superglass®-Hex Superglass®-Biber Superglass®	Cambridge Xtreme 9,5° Cambridge Xpress Monarch®-Diamant DiamantShield® PLUS ArmourShield® PLUS Diamant® PLUS Superglass®-Hex Superglass®-Biber Superglass®
275 cm²/m * min. 16,50 – max. 33,01 m²/m **		258 cm²/m * min. 15,48 – max. 30,97 m²/m **
 ≥ 9,5°***		 15° - 45°





x 10/ 



x 10/ 





Armourvent® STANDARD	Armourvent® SPECIAL	Airhawk®	
45 x 43 x 11 cm	40 x 37 x 7,5 cm	Ø = 30,48 cm (12 inch)	Ø = 35,56 cm (14 inch)
 Black Brown	 Black Red	 Black Brown Alu Grey	 Alu Grey
322 cm²/pc. * min. 19,33 m²/pc. ** max. 38,66 m²/pc. **	30 cm²/pc. * min. 1,80 m²/pc. ** max. 3,60 m²/pc. **	613 cm²/pc. * min. 36,79 m²/pc. ** max. 73,59 m²/pc. **	852 cm²/pc. * min. 51,14 m²/pc. ** max. 102,28 m²/pc. **
 15° - 45°	 15° - 90°	 9,5° - 45°	

* = Ventilation area | ** = Ventilated roof area | *** = Follow shingles minimum roof slope

MASTICS & NAILS














Shingle Stick	Plastal Stick	Plastal	Galvanised nails			Galvanised nails			BOSTITCH coiled nails		
310 ml	310 ml	5 kg	1 kg			5 kg			7200 pcs.		
x 12/ 	x 12/ 	-	length	pcs.	m²	length	pcs.	m²	length	kg	m²
Premium Elastomeric bitumen based mastic	Elastomeric bitumen based mastic	Elastomeric bitumen based mastic	20 mm	± 690	± 20	20 mm	± 3450	± 98	25 mm	12,65	± 205
			25 mm	± 582	± 16	25 mm	± 2910	± 83	31 mm	15,10	± 205
						30 mm	± 2480	± 70			
						35 mm	± 2150	± 61			

UNDERLAYS










	Armourbase® ECO	Armourbase® PRO	How waterproof and strong is IKO Armourbase Pro underlayment? 	Armourbase® PRO PLUS	Armourbase® STICK
SA (self-adhesive)	-	-		overlapping part	full SA
effective coverage area:					
≥ 21° - 85°	90 %	90 %		90 %	90 %
≥ 15° - 20°	50 %	50 %		90 %	90 %
≤ 15°	50 %	50 %		90 %	90 %
l x w (m)	50 x 1	30 x 1		30 x 1	20 x 1
pcs/pallet	20	40	33	45	
mm	0,6	0,5	0,5	0,5	

IKO BASE

An APP modified underlayment under Armourvalley for full adhesion torching on low sloped roofs.

l x w (m)	12 x 1
pcs/pallet	24
mm	2,1

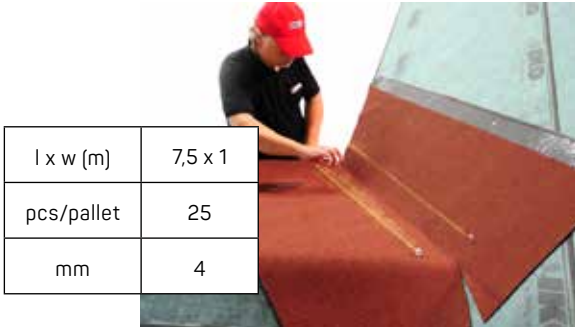

l x w (m)	7,5 x 1
pcs/pallet	25
mm	4


ARMOURVALLEY




01
ARMOURVALLEY
Black



03
ARMOURVALLEY
Amazon green



07
ARMOURVALLEY
Dual brown



10
ARMOURVALLEY
Tile red



31
ARMOURVALLEY
Slate



53
ARMOURVALLEY
Autumn brown

An APP modified roll manufactured in matching shingle colours for use in the valleys of shingle roofs or on low slope roof areas adjacent to shingles.